



A WASTEBUILT COMPANY

# FRONT/REAR LOAD COMPACTOR MODEL GF6F/GF6R

## Attractively Blends Into Its Surroundings

Galfab's neat, clean appearance, in both the rear loading model and the front loading model, blends attractively with its surroundings. With the Galfab's low 40" loading height, even the most petite person can handle the job. Close the lid, insert the key in the Power Pack Console and turn the Galfab's powerful hydraulic system on. The packing blade automatically cycles.

Incorporated in the Galfab design are unique safety features that prevent the compaction cycle from operating while the loading chamber lid is open. Another important safety back-up feature is a mushroom STOP button on the Power Pack console that will halt operation at any point in the cycle. The Galfab's key-operated system also allows the charge lid to be locked for controlled access.

### Our Mission

Galfab's mission is to provide our customers with a world class distribution of equipment, parts, and services supported by manufacturing facilities.



**GF6R**  
Rear Loader

**GF6F**  
Front Loader

### Galfab Advantage:

- **Latching System** lid hold down latches for quick driver release when dumping.
- **Compact Weather Proof 3 Phase** and/or Single Phase Power Unit (UL Approved).
- **Loading Chamber Lid** is spring assisted for ease of opening.



Latching System



Compact Weather Proof 3 Phase




Loading Chamber Lid


# Front/Rear Load Compactor Model GF6F/GF6R

## Compactor Dimensions

### GF6R

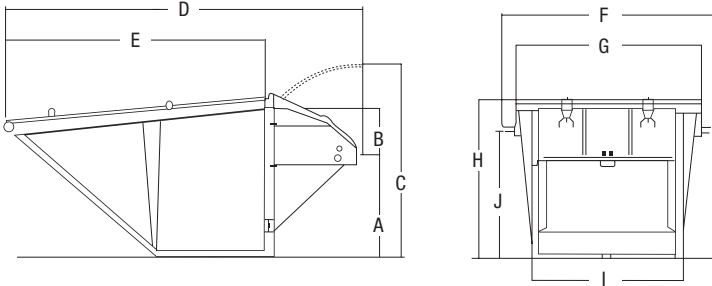

### GF6F

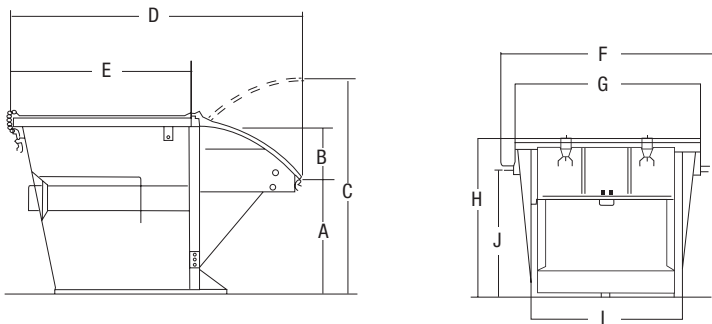

MODEL	CAPACITY	A	B	C	D	E	F	G	H	I	J	WEIGHT <sup>1</sup>
GF6R	6 y <sup>3</sup>	40"	75"	18"	140"	102"	78"	71"	61"	48"	60"	2,380 lbs.
GF6F	6 y <sup>3</sup>	40"	18"	75"	102"	63"	82"	75"	62"	60"		2,280 lbs

<sup>1</sup> Approximate Shipping Weight with Power Pack

**Check out our other self-contained compactors. If you need help determining the right model for your needs, please contact at 877.504.1622**  
*Shown GF2SC self-contained compactor model.*

## GF6R/GF6F Specifications

Manufacturer's Rating	1.00 y <sup>3</sup>
Ram Face	53"W x 46"H
Clear Top Opening	27.5" x 53.5"
Loading Height	40"
Ram Penetration	13"
Packing Force Normal	21,900 lbs
Packing Force Max.	24,700 lbs.
Packing Pressure Normal	1,550 PSI
Packing Pressure Max.	1,750 PSI
Container Capacity	6 y <sup>3</sup>
Overall Dimensions	140" L x 78"W x 61"H

## Standard Power Pack

Power Pack Cover	Protective Metal Cover with Hydraulic Hose Storage Slot
Power Pack	3 HP 1750 RPM TEFC
Control Panel	208/230/460 Volts 3 Phase 60 Hertz, Key Start Switch & Stop Buttons
Hydraulic Pump	5 GPM Hi-Lo with 200 Mesh Screen Suction Filter
Reservoir	13 Gallons
Fluid	Northland Talmar Extreme ISO 32
Hydraulic Hoses	12" with Quick Hydraulic Couplers Industrial Hydraulic Couplers
Cylinders	2 - 3" x 16"

## Cycle Time

Time	26 Seconds
------	------------

